


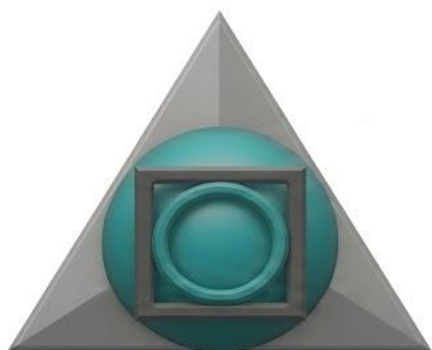

AAA-ACME RUBBER

AAAACME RUBBER CO.

A Division of Fillipone Enterprises Inc.

2003 E. 5th Street, #1
Tempe, AZ 85288

Phone: 480-966-9311 Email: info@acmerubber.com

AFLAS® SHEET COMPOUND A7006

A7006 is a 75 durometer high temperature resistant fluoroelastomer compound. It provides excellent resistance to acids, bases, high pH corrosion inhibitors, sour gas and oil, high pressure steam, and alcohols.

This material is unique in offering fair resistance to aromatic solvents and fuels, as well as ketones and low molecular weight esters and ethers.

Service Temperature Range: -10°F to 675°F

Note: AFLAS is not recommended for service in chlorinated solvents, Freon refrigerant, or tetrahydrofurane solvent.

Physical Properties (Typical)

The following properties were obtained on molded 0.080 inch thick ASTM samples. They are typical of A7006 but should not be used to set quality control specification minimum requirements.

HARDNESS (SHORE A)	75
TENSILE STRENGTH (PSI)	2600
ELONGATION AT BREAK (%)	210%
MODULUS AT 100% ELONGATION (PSI)	1150
TEAR STRENGTH (PPI)	128
SPECIFIC GRAVITY	1.58
COMPRESSION SET (%) (22 hrs @ 350°F)	31%

The data is based on testing and is accurate to the best of our knowledge. Since applications, test methods, and procedures may vary, we recommend that users perform their own tests to assure suitability for their specific application. We offer no product warranty, expressed or implied, except for the replacement of product proven defective.