


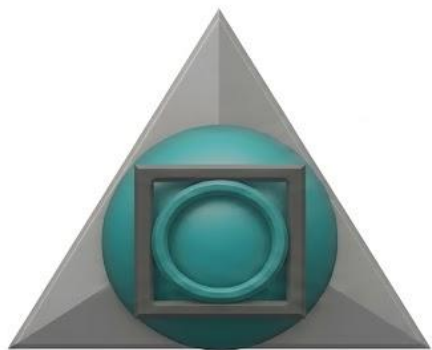

AAA-ACME RUBBER

AAACME RUBBER CO.

A Division of Fillipone Enterprises Inc.

2003 E. 5th Street, #1

Tempe, AZ 85288

Phone: 480-966-9311 Email: info@acmerubber.com

AAA-ACME RUBBER COMPOUND #70009 VITON SPONGE

#70009 closed cell Viton formulation is manufactured with a continuous skin on both sides. The skin makes the sheet stronger and more tear-resistant.

#70009 sponge is generally resistant to aliphatic and aromatic hydrocarbons, oils, fuels, ozone and weather, lubrications, and animal or vegetable oils. It is also resistant to acids and hot water. Viton sponge sheets have a service temperature range of -10°F to 400°F.

TYPICAL PHYSICAL PROPERTIES

THICKNESS	1/8"	3/16"	1/4"	3/8"	1/2"
Compression Deflection (PSI) (25% Deflection - Original)	6.5	6.0	5.5	4.0	3.5
Compression Deflection (PSI) (25% Deflection - 7 Days @ 400°F)	9.0	7.8	7.5	6.0	5.0
Compression Set (%) (22 Hours @ 75°F)	27%	20%	13%	15%	10%
Compression Set (%) (22 Hours @ 158°F)	100%	100%	100%	100%	100%
Low Temperature Brittleness (°F)	-40°F	-35°F	-30°F	-30°F	-30°F
Density - Lbs. Per Cubic Foot	18	18	18	15	10

The data presented is based on testing and to our knowledge is accurate. Since applications, test methods and procedures may vary, we recommend that users of our product perform their own tests to assure the suitability of these products for their application. We offer no product warranty, either expressed or implied, except any product proven defective will be replaced. Freedom from present or future infringement cannot be guaranteed, nor can the suitability for a specific application.